

**FRESH
WATER**

Submersible

Electric Engine

**3 YEARS
WARRANTY**

DISCHARGE FLOW

15.6 m³/h

SOLIDE SIZE

6 mm


POIDS

10 kg



CAN PUMP DOWN
TO A HEIGHT OF 20 MM

VERTICAL OR
HORIZONTAL DELIVERY

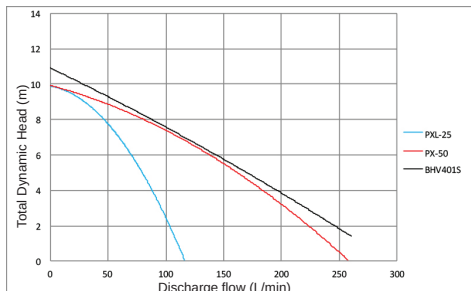

Our submerged, compact, and lightweight pumps are specially designed for daily and intensive use. An optimum sealing system and thermal protections ensure safe usage. They meet various pumping needs: basement flooding, water evacuation on construction sites, intervention in mining or industrial sites, solutions for firefighters and military.

PX-50

Pump type		Submersible - Electrical
Delivery Ø coupling	mm	50 (2")
Discharge flow	L/min	260
Discharge flow	m³/h	15.6
Total dynamic head	m	10
Solid size Ø	mm	6
Voltage	V	230
Frequency	Hz	50
Intensity	A	-
Rated power	W	620
Engine speed	RPM	2900
Electric cable with male plug	m	10
Dimensions L x H	mm	180 x 290
Packaging dimensions L x W x H	mm	240 x 240 x 380
Net Weight	kg	10
Gross weight	kg	12

Reference

200005001

STANDARD EQUIPMENT

- ✓ Hose Coupling and clamp
- ✓ Screw Hose Coupling