

Trash Water

Self-Priming

Intensive Work

4ST Petrol

High Discharge Work

3 YEARS
WARRANTY

DISCHARGE FLOW
120 m³/h

PRESSURE
2.3 bar


SOLID SIZE Ø
31 mm

NET WEIGHT
88.5 kg

powered by



EASY QUICK CLEAN
OUT PORT

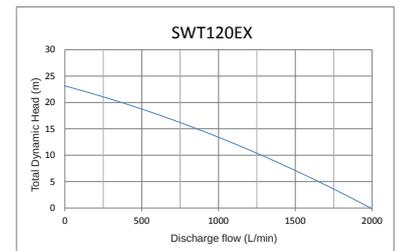

Built around durability, our SWT gasoline trash pumps feature a silicon carbide seal and a unique conical cast iron impeller design and a quickclean out port for easy maintenance and long service life. They reduce wear from abrasive materials and can handle solid objects up to 31 mm in diameter. There's even a strainer to ensure nothing bigger gets through.

SWT 120 EX

| | | |
|------------------------------------|-------------------|------------------------|
| Pump type | | Self-Priming |
| Suction Ø coupling | mm | 100 (4") |
| Delivery Ø coupling | mm | 100 (4") |
| Discharge flow | L/min | 2000 |
| Discharge flow | m ³ /h | 120 |
| Pressure | bar | 2.3 |
| Total dynamic head | m | 23 |
| Discharge head | m | 8 |
| Solid size Ø (Ø of strainer holes) | mm | 31 |
| Mechanical seal | | Silicon carbide |
| Engine model | | EX40 - WORMS |
| Engine type | | OHC, 4-stroke gasoline |
| Fuel type | | Petrol RON 95 |
| Fuel tank capacity | L | 7 |
| Run Time | h | 2 h 30 |
| Dimensions L x W x H | mm | 1360 x 680 x 830 |
| Net Weight | kg | 88.5 |

STANDARD EQUIPMENTS

- ✓ Four-stroke OHC engine
- ✓ Recoil start
- ✓ Electronic oil sensor security
- ✓ Silicon carbide mechanical seal
- ✓ Steel strainer, STORZ hose coupling and clamp

OPTIONAL EQUIPMENTS

- ✓ Maintenance KIT N°4