

WORMS
ENTREPRISES

YAMAHA EH SERIE

EH 65

MULTI-PURPOSE

22^{HP}





↘ The Overhead Valve V-Twin Cylinder Series industrial engines deliver smooth, reliable torque and low fuel consumption throughout the rpm range. The series provides maximum versatility in models with horizontal or vertical PTO shafts, which means you can use them with a greater variety of industrial and construction equipment. They're also ideal for slightly larger equipment, such as lawn mowers, trenchers, ride-on trowels, concrete saws and vibratory rollers.

Carbureted for simplicity and reliable power | Pressurized lubrication system with filtration | 12V (15A) high wattage alternator | Large capacity dual filtration air filter




Specifications

Replace	—
Bore & Stroke	80 x 65 mm
Displacement	653 cm ³
Maximum Output - 3600 RPM	22 HP
Continuous Output - 3000 RPM	—
Continuous Output - 3600 RPM	17 HP
Maximum Torque - 2500 RPM	45.6 N•m
Fuel Tank Capacity	2.7 L
Oil Capacity	1 L
Recoil Start	—
Dimensions L x W x H	317 x 477 x 480 mm
Dry Weight	44 kg

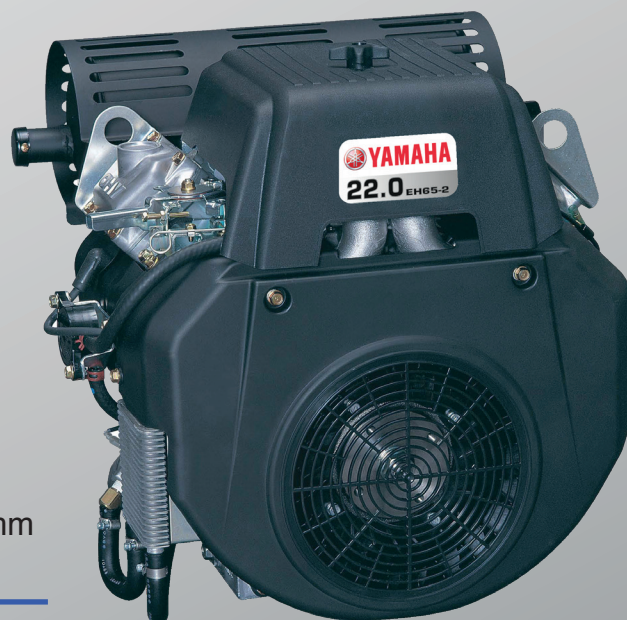


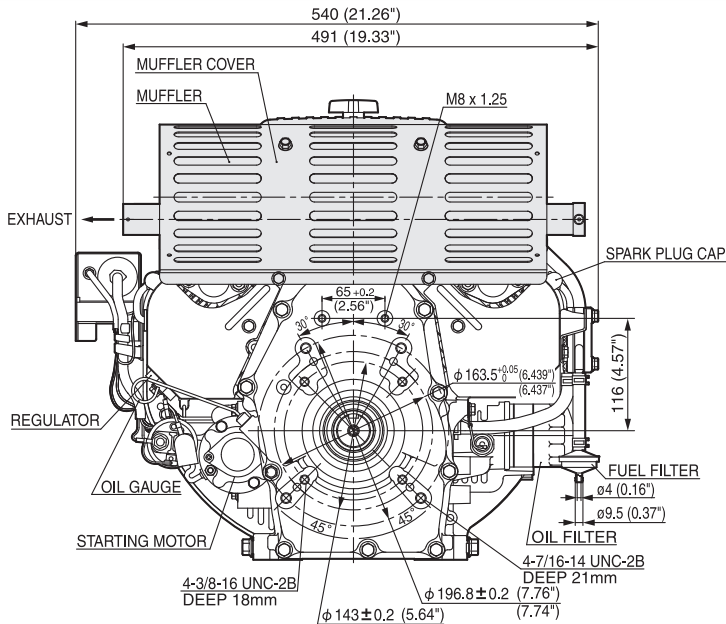


METRIC FLANGE

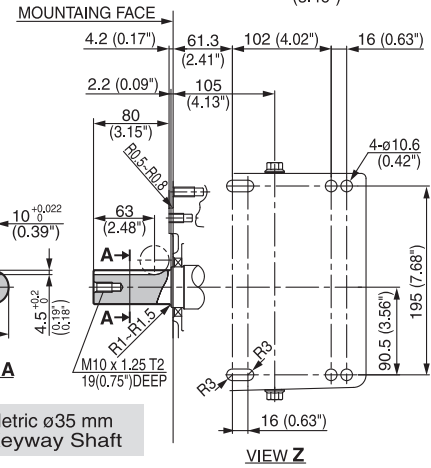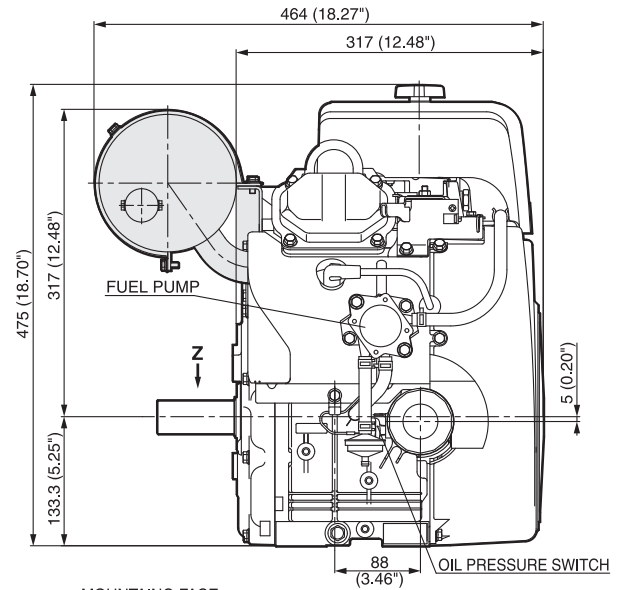


Metric 1/10 taper Generator Shaft

Metric ø35 mm Keyway Shaft

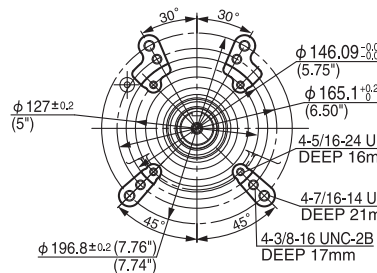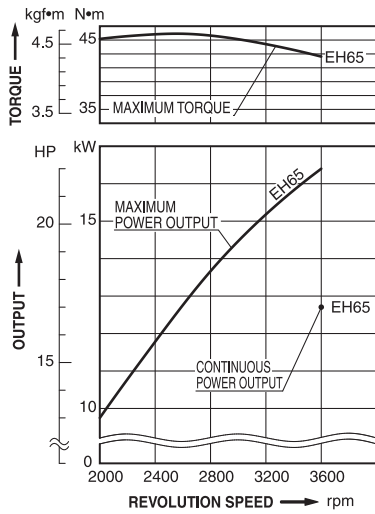


SAE-B FLANGE

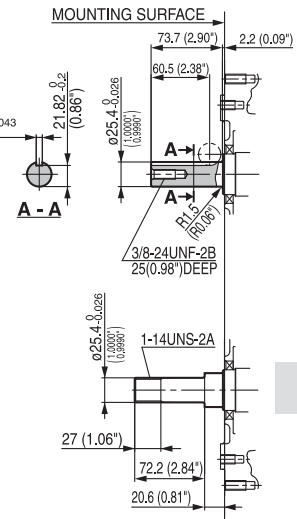


SAE ø1 inch Keyway Shaft


SAE ø1 inch Pump Shaft

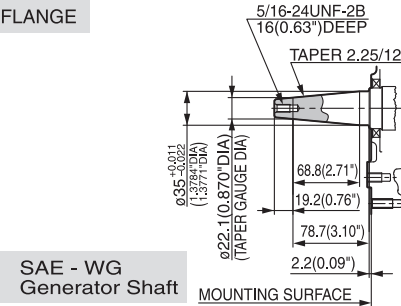

SAE - WG Generator Shaft

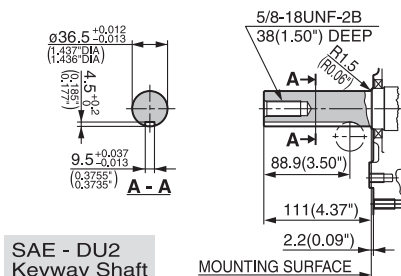

SAE - DU2 Keyway Shaft

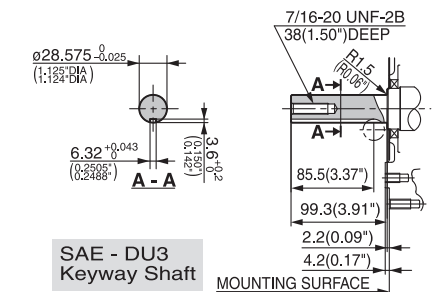

SAE - DU3 Keyway Shaft

