


**SINGLE PHASE**  
**230 V / 50 Hz**  
**GASOLINE**

**3 YEARS**  
**WARRANTY**

**MAX OUTPUT**  
**2.7 kW**

**LONG RUN**  
**TANK**

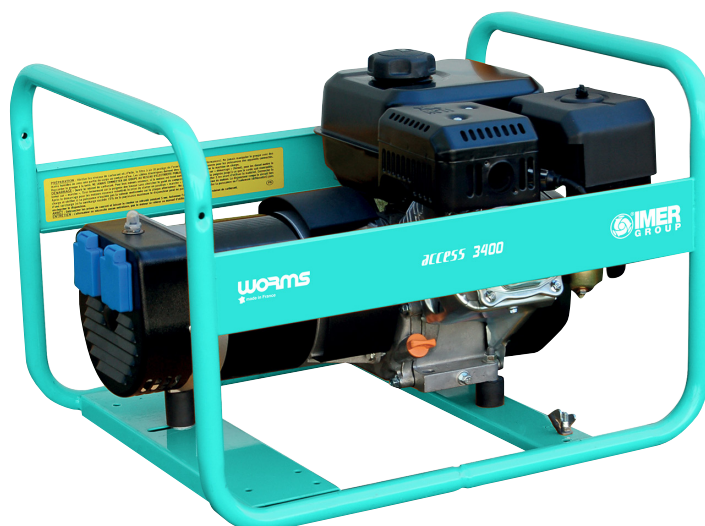

Designed for frequent use, the ACCESS 3400 genset has a OHV engine selected by WORMS. It is powerful, reliable and economically attractive for use on off-road construction sites: mechanically welded steel frame, all parts of the group are protected against blows in construction sites.

## ACCESS 3400

Type		1 phase
Voltage regulator		Capacitor
Maximum AC output	kW	2.7
Continuous operating power (COP)	kW	2.1
Maximum Amps	A	11.7
AC voltage	V	230
Frequency	Hz	50
Noise level EEC (LwA)	dB(A)	96
Noise level @ 7 m	dB(A)	71
Engine		WORMS R210
Maximum output	HP	5.4
Fuel type		Unleaded gasoline 95
Fuel tank capacity	L	3.6
Run Time (@ ¾ of the continuous output)	h	3 h 40
Dimensions L x W x H	mm	600 x 470 x 415
Packaging dimensions L x W x H	mm	615 x 485 x 445
Net weight	kg	37
Gross weight	kg	38
Reference		2V0000001

## STANDARD EQUIPMENT

- ✓ 4-stroke OHV gasoline engine
- ✓ Recoil starter
- ✓ Electronic oil sensor security
- ✓ 2 Single phase socket 10/16 A Schuko 230 V
- ✓ Sockets protected by thermal circuit breaker

## OPTIONAL EQUIPMENT

- ✓ Wheelbarrow kit 1/180 Monobras
- ✓ Circuit breaker kit (factory option): 30 mA circuit breaker + Copper Ground Rod + box