


SINGLE PHASE
230 V / 50 Hz
GASOLINE

3 YEARS
WARRANTY

MAX OUTPUT
5.4 kW

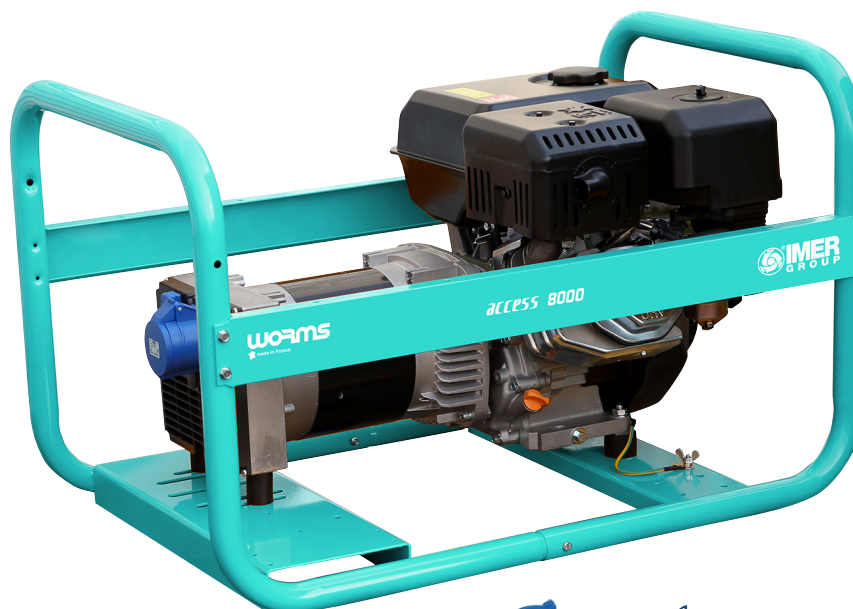

Optional accessory
Male plug n°2 - 32 A - 230 V



Designed for frequent use, the ACCESS 8000 genset has a OHV engine selected by WORMS. It is powerful, reliable and economically attractive for use on off-road construction sites: mechanically welded steel frame, all parts of the group are protected against blows in construction sites.

2000/14/EC

ACCESS 8000

Type		1 phase
Voltage regulator		Capacitor
Maximum AC output	kW	5.4
Continuous operating power (COP)	kW	4.7
Maximum Amps	A	23.4
AC voltage	V	230
Frequency	Hz	50
Noise level EEC (LwA)	dB(A)	101
Noise level @ 7 m	dB(A)	76
Engine		WORMS R390
Maximum output	HP	10.1
Fuel type		Unleaded gasoline 95
Fuel tank capacity	L	6.5
Run Time (@ ¾ of the continuous output)	h	3 h 50
Dimensions L x W x H	mm	875 x 570 x 600
Packaging dimensions L x W x H	mm	890 x 580 x 620
Net weight	kg	70
Gross weight	kg	72
Reference		2V0000003

STANDARD EQUIPMENT

- ✓ 4-stroke OHV gasoline engine
- ✓ Recoil starter
- ✓ Electronic oil sensor security
- ✓ 1 Single phase socket 10/16 A Schuko 230 V
- ✓ 1 Single phase socket 230 V / 32 A
- ✓ Sockets protected by thermal circuit breaker

OPTIONAL EQUIPMENT

- ✓ Wheelbarrow kit N/360
- ✓ Circuit breaker kit (factory option): 30 mA circuit breaker + Copper Ground Rod + box

2000/14/EC

Equipment intended to be installed with all the proper rules, inside a building or reserved for use in a country not subject to Directive 2000/14/EC (excluding UE and affiliated countries).