


SINGLE PHASE
230 V / 50 Hz
GASOLINE

ACCESS 8000
 Generator range

MAX OUTPUT
6.6 kW

3 YEARS
WARRANTY

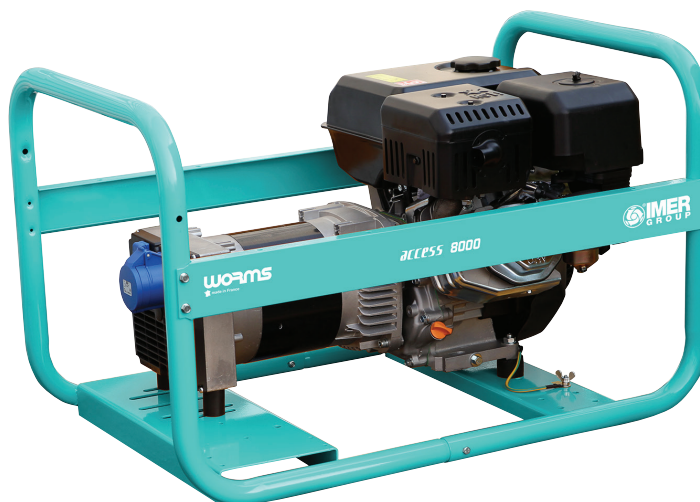

Designed for frequent use, the ACCESS 8000 genset has a OHV engine selected by WORMS. It is powerful, reliable and economically attractive for use on off-road construction sites: mechanically welded steel frame, all parts of the group are protected against blows in construction sites.

Standard equipment

- ✓ Four-stroke OHV engine
- ✓ Recoil start
- ✓ Electronic oil sensor security
- ✓ 1 Single phase socket 10/16 A Schuko
- ✓ 1 EC Single phase socket 230 V / 32 A
- ✓ Sockets protected by thermal circuit breaker
- ✓ Brushless alternator, 2 poles

Optional equipment

- + Wheelbarrow kit N/360
- + Kit interdif (factory option): Earth leakage circuit breaker 30 mA + Steel Ground Rod + box



Optional accessory
 Male plug n°2 - 32 A - 230 V

2000/14/EC

ACCESS 8000

Type		Single phase
Voltage regulator		Capacitor
Maximum output	kW	6.6
Continuous operating power (COP)	kW	5.8
Maximum Amps	A	28.7
AC voltage	V	230
Frequency	Hz	50
Noise power level CEE (LwA)	dB(A)	101
Noise power level @ 7 m	dB(A)	76
Engine model		WORMS R420
Maximum output	HP	11.3
Fuel type		Unleaded gasoline 95
Fuel tank capacity	L	6.7
Autonomy (¾ of the continuous output)	h	3 h 10
Dimensions L x l x H	mm	875 x 570 x 600
Packaging dimensions L x W x H	mm	890 x 580 x 620
Net Weight	kg	75
Gross weight	kg	77

2000/14/EC

Equipment intended to be installed with all the proper rules, inside a building or reserved for use in a country not subject to Directive 2000/14/EC (excluding UE and affiliated countries).