


SINGLE PHASE
230 V / 50 Hz
DIESEL

MAX OUTPUT
5.2 kVA

VERY LONG RUN
TANK

ELECTRIC
START

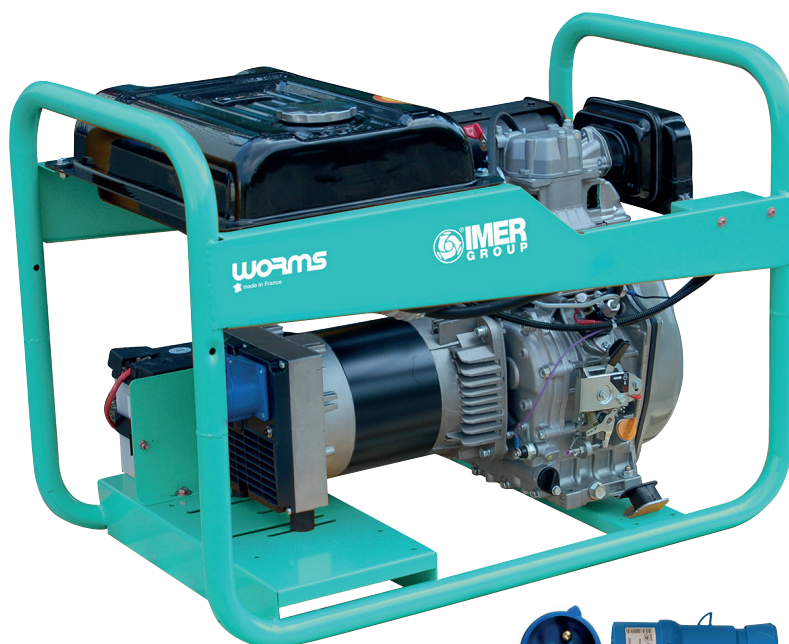

powered by
YANMAR



Optional accessory
Male plug n°2 - 32 A - 230 V

These models are designed for residential or construction areas and are characterized by their compactness and robustness. A proven Yanmar engine and a high-quality alternator ensure reliable electrical power production even under the most demanding conditions.



MASTER 6010 DXL15 YN DE

Type		1 phase
Voltage regulator		Capacitor
Maximum output	kW	5.2
Continuous operating power (COP)	kW	4.5
Maximum Amps	A	22.6
AC voltage	V	230
Frequency	Hz	50
Noise power level EEC (LwA)	dB(A)	103
Noise power level @ 7 m	dB(A)	78
Engine model		YANMAR L100V5
Maximum output	HP	8.4
Fuel type		Diesel (Do not use domestic or heating oil)
Fuel tank capacity	L	15
Run Time (@ ¾ of the continuous output)	h	9 h 45
Dimensions L x l x h	mm	875 x 535 x 635
Packaging dimensions L x W x H	mm	895 x 555 x 655
Net weight	kg	95.5
Gross weight	kg	99.5
Reference		2V0000054

STANDARD EQUIPMENT

- ✓ 4-stroke Diesel engine
- ✓ Electric start + Battery
- ✓ Low oil pressure security
- ✓ Large tank
- ✓ Fuel gauge
- ✓ 1 Single phase socket 10/16 A Schuko 230 V
- ✓ 1 EC Single phase socket 230 V / 32 A
- ✓ Sockets protected by thermal circuit breaker

OPTIONAL EQUIPMENT

- ✓ Wheelbarrow kit N/360 AXE
- ✓ AVR: Automatic Voltage Regulation (factory option)
- ✓ Kit interdif (factory option): 30 mA interdifferential kit + Copper Ground Rod + box



Equipment intended to be installed with all the proper rules, inside a building or reserved for use in a country not subject to Directive 14/2000/EC (excluding UE and affiliated countries).