


SINGLE PHASE
230 V / 50 Hz
GASOLINE

MAX OUTPUT
4 kW

CURRENT ~
AC WELDING

ELECTROD DIAM.
5 MM

ELECTROD
RUTILE

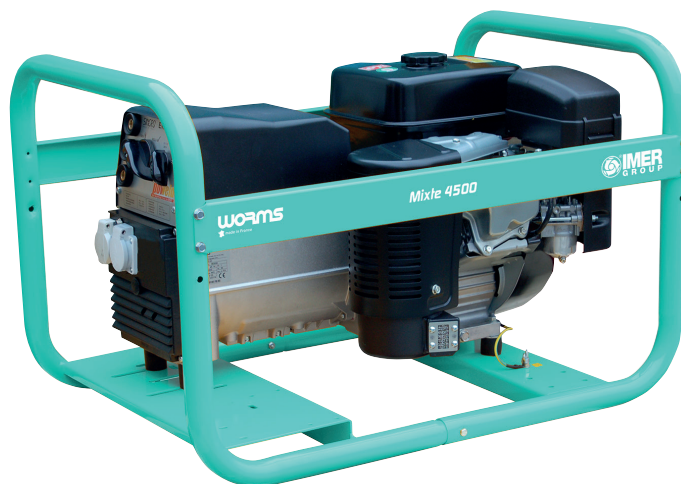

**3 YEARS
WARRANTY**



powered by



At the same time generator and welder, with AC welding current. In welder position, you can make welding with alternating welding current.

MIXTE 4500 EX

Type		1 Phase
Voltage regulator		Capacitor
Maximum output	kW	4.0
Continuous operating power (COP)	kW	2.6
Maximum Amps	A	17.4
AC voltage	V	230
Frequency	Hz	50
Noise power level EEC (LwA)	dB(A)	95
Noise power level @ 7 m	dB(A)	70
Maximum electrode diameter	mm	Ø 3.2
Welding Amp Range	A	50 → 150
Striking Alternative Current	V	50 - 62.5
Minimum welding voltage	V	22.4
Maximum Welding Current	A	150
Engine model		WORMS EX27
Maximum output	HP	9
Fuel type		UNLEADED GASOLINE 95
Fuel tank capacity	L	5.6
Run Time (@ ¾ of the continuous output)	h	3 h
Dimensions L x l x h	mm	765 x 570 x 520
Packaging dimensions L x W x H	mm	780 x 585 x 550
Net weight	kg	73.5
Gross weight	kg	75
Reference		2V0003000

STANDARD EQUIPMENT

- ✓ 4-stroke OHC gasoline engine
- ✓ Recoil starter
- ✓ Electronic oil sensor security
- ✓ 2 Single phase socket 10/16 A Schuko 230 V
- ✓ Sockets protected by thermal circuit breaker
- ✓ AVR: Automatic Voltage Regulation
- ✓ Intensity rheostat
- ✓ Electric source selector
- ✓ Welding terminals

OPTIONAL EQUIPMENT

- ✓ Wheelbarrow kit N/360
- ✓ Welding kit: CABLE KIT N° 1
- ✓ Kit interdif (factory option): 30 mA interdifferential kit + Copper Ground Rod + box