




THREE PHASE
400 V / 50 Hz
DIESEL

MAX OUTPUT
6.5 kVA

VERY LONG RUN
TANK

ELECTRIC
START

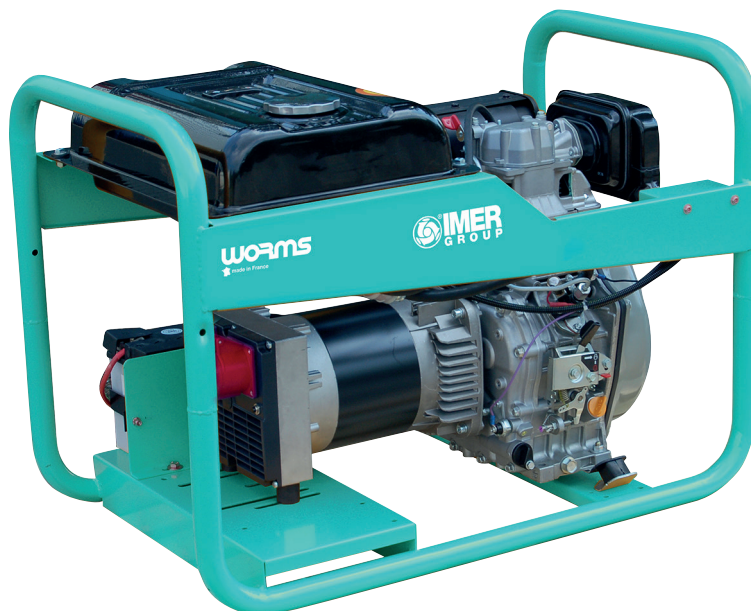

powered by
YANMAR

Your tools needs three phase current, Tristar range bring you the solution. Equipped with a gasoline engine, you will find surely the best generator that is made for you.

2000/14/EC

TRISTAR 6510 DTXL15 YN DE

Type		3 Phase	/	1 Phase
Voltage regulator		Compound		
Maximum output	kW	5.2	/	3.7
Continuous operating power (COP)	kW	4.5	/	–
Maximum output	kVA	6.5	/	–
Maximum Amps	A	9.4	/	16
AC voltage	V	400	/	230
Frequency	Hz	50		
Noise power level EEC (LwA)	dB(A)	103		
Noise power level @ 7 m	dB(A)	78		
Engine model		YANMAR L100V5		
Maximum output	HP	8.4		
Fuel type		Diesel (Do not use domestic or heating oil)		
Fuel tank capacity	L	15		
Autonomy (@ ¾ of the continuous output)	h	9 h 45		
Dimensions L x l x h	mm	875 x 535 x 635		
Packaging dimensions L x W x H	mm	895 x 555 x 655		
Net weight	kg	120		
Gross weight	kg	126		
Reference		2V0000049		

STANDARD EQUIPMENT

- ✓ 4-stroke Diesel engine
- ✓ Recoil start
- ✓ Electric start + Battery
- ✓ Low oil pressure security
- ✓ Large tank
- ✓ Fuel gauge
- ✓ 1 Single phase socket 10/16 A Schuko 230 V
- ✓ 1 Three phase socket 400 V / 16 A
- ✓ Sockets protected by thermal circuit breaker

EQUIPMENT OPTIONAL

- ✓ Wheelbarrow kit N/360 AXE
- ✓ AVR (option usine) : Régulateur de tension électronique
- ✓ Kit interdif (factory option): 30 mA interdifferentiel kit + Copper Ground Rod + box

2000/14/EC

Equipment intended to be installed with all the proper rules, inside a building or reserved for use in a country not subject to Directive 2000/14/EC (excluding UE and affiliated countries).