

FRESH WATER

## ACCESS J 8-25

Pumps Range

Self-Priming


ENGINE  
**4ST | Gasoline**

DISCHARGE FLOW  
**8 m<sup>3</sup>/h**

PRESSURE  
**2 bar**

SOLID SIZE Ø  
**5 mm**

NET WEIGHT  
**14 kg**

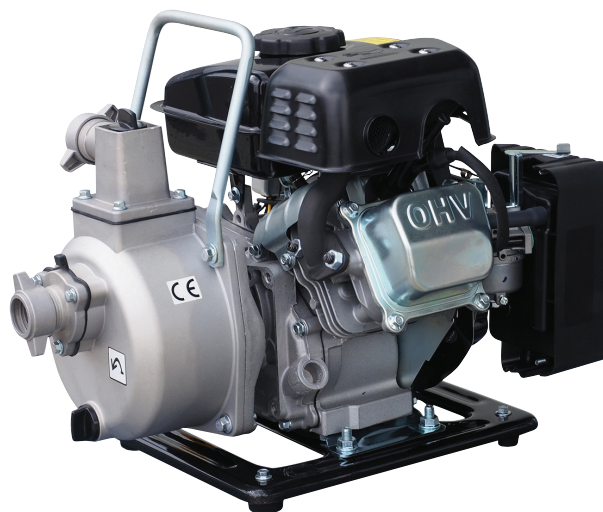

**3 YEARS**  
WARRANTY

The ACCESS models have a 4-stroke engine selected by IMER and are ideally suited for watering and irrigation of parks and gardens as well as emptying the cellar waters.

### Standard equipment

- ✓ Four-stroke OHV engine
- ✓ Recoil start
- ✓ Self-Priming
- ✓ Ceramic carbon mechanical seal
- ✓ Plastic strainer, hose coupling and clamp

### Optional equipment

- + Firefighter hose coupling

### ACCESS J 8-25

Pump type		Self-Priming
Suction Ø coupling	mm	25 (1")
Delivery Ø coupling	mm	25 (1")
Discharge flow	L/min	133
Discharge flow	m <sup>3</sup> /h	8
Pressure	bar	2.0
Total dynamic head	m	20
Discharge head	m	6
Solid size Ø (Ø of strainer holes)	mm	5
Mechanical seal		Ceramic carbon
Engine model		WORMS R 80-V
Engine type		OHV, 4-stroke gasoline
Fuel type		Unleaded gasoline 95
Fuel tank capacity	L	1.6
Autonomy	h	3 h
Dimensions L x l x H	mm	385 x 300 x 375
Packaging dimensions L x W x H	mm	435 x 320 x 390
Net Weight	kg	14
Gross weight	kg	16

#### WORMS Entreprises

ZAC de Lamirault  
39 rue de Lamirault  
77090 Collégien  
FRANCE  
TEL. +33 (0) 1 64 76 29 50  
FAX +33 (0) 1 64 76 29 99  
www.wormsentreprises.com