

Trash Water

Submersible

Construction Site Pumpe


3 YEARS
WARRANTY

Electric Engine

DISCHARGE FLOW
15 m³/h

SOLIDE SIZE
25 mm

POIDS
10 kg

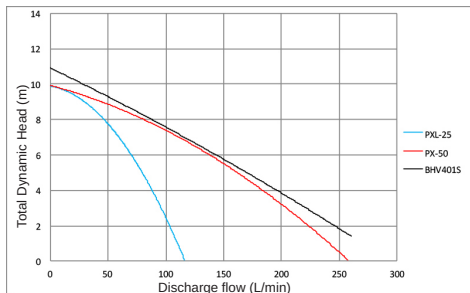

Our submerged, compact, and lightweight pumps are specially designed for daily and intensive use. An optimum sealing system and thermal protections ensure safe usage. They meet various pumping needs: basement flooding, water evacuation on construction sites, intervention in mining or industrial sites, solutions for firefighters and military.

BHV401S

Pump type		Submersible - Electrical
Delivery Ø coupling	mm	50 (2")
Discharge flow	L/min	250
Discharge flow	m ³ /h	15
Total dynamic head	m	11
Solid size Ø	mm	25
Voltage	V	230
Frequency	Hz	50
Intensity	A	-
Rated power	W	650
Engine speed	RPM	2950
Electric cable with male plug	m	10
Dimensions L x H	mm	188 (250) x 372
Packaging dimensions L x W x H	mm	270 x 210 x 480
Net Weight	kg	10
Gross weight	kg	11

Reference

200005002

STANDARD EQUIPMENT

- ✓ Threaded Hose Coupling
- ✓ Screw Hose Coupling

