

**Special
Chemical
Liquids,
Sea Water**

P 52 EX
Pumps range

Self-Priming


**ENGINE
4ST | Gasoline**

**DISCHARGE FLOW
45 m³/h**

**PRESSURE
3.8 bar**

**SOLID SIZE Ø
6 mm**

**NET WEIGHT
24 kg**

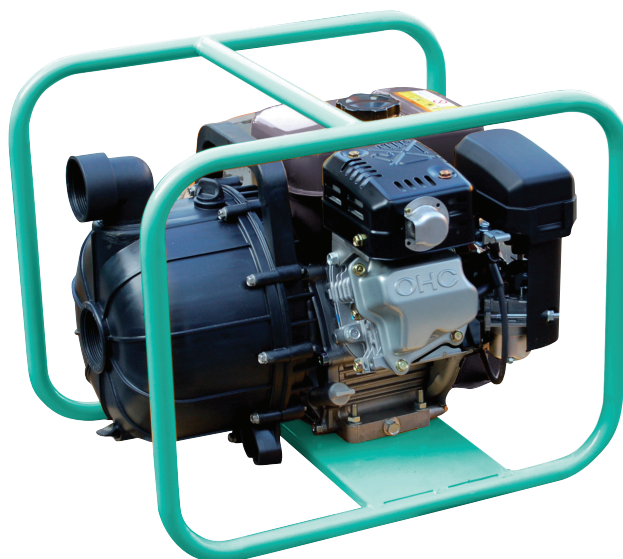

**3 YEARS
WARRANTY**

powered by



P52EX is ideal for handling aggressive, corrosive and hazardous chemicals liquids. This thermoplastic pump in polyethylene is also suitable for sea water transfers. P52EX equipped with Viton rubber gasket kit (factory option) is the appropriate solution for hydrocarbon transfers (Gasoil, Kerosene).

Standard equipment

- ✓ Four-stroke OHC engine
- ✓ Recoil start
- ✓ Electronic oil sensor security
- ✓ Ceramic carbon mechanical seal
- ✓ Plastic strainer, hose coupling and clamp

Optional equipment

- + Wheelbarrow kit (factory option): REF. 13
- + Firefighter hose coupling
- + Viton rubber gasket (factory option)
- + Maintenance KIT N°2

P 52 EX		
Pump type		Self-Priming
Suction Ø coupling	mm	50 (2")
Delivery Ø coupling	mm	50 (2")
Discharge flow	L/min	750
Discharge flow	m ³ /h	45
Pressure	bar	3.8
Total dynamic head	m	38
Discharge head	m	8
Solid size Ø (Ø of strainer holes)	mm	6
Mechanical seal		Ceramic carbon
Engine model		WORMS EX17
Engine type		OHC, 4-stroke gasoline
Fuel type		Unleaded gasoline 95
Fuel tank capacity	L	3.2
Autonomy	h	2 h 20
Dimensions L x l x H	mm	520 x 400 x 425
Packaging dimensions L x W x H	mm	532 x 420 x 445
Net Weight	kg	24
Gross weight	kg	26

WORMS Entreprises

ZAC de Lamirault
39 rue de Lamirault
77090 Collégien
FRANCE
TEL. +33 (0) 1 64 76 29 50
FAX +33 (0) 1 64 76 29 99
www.wormsentreprises.com