

Trash  
Water

High Discharge Flow

Intensive Work

# SWT 150 EXL12

Pumps Range

Self-Priming


ENGINE  
4ST | Gasoline

DISCHARGE FLOW  
155 m<sup>3</sup>/h

PRESSURE  
3 bar

SOLID SIZE Ø  
31 mm

NET WEIGHT  
140 kg

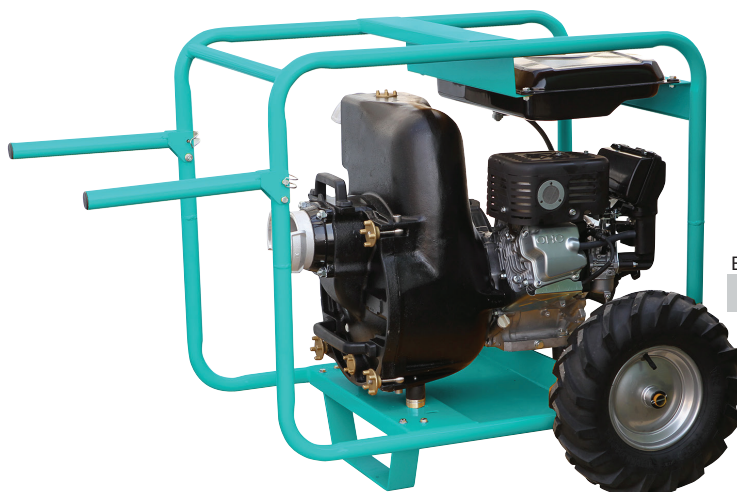

**3 YEARS**  
WARRANTY

EASY QUICK CLEAN  
out port

powered by



TROLLEY VERSION

Built around durability, our SWT gasoline trash pumps feature a silicon carbide seal and a unique conical cast iron impeller design and a quickclean out port for easy maintenance and long service life. They reduce wear from abrasive materials and can handle solid objects up to 31 mm in diameter. There's even a strainer to ensure nothing bigger gets through.

### Standard equipment

- ✓ Four-stroke OHC engine
- ✓ Recoil start
- ✓ Electronic oil sensor security
- ✓ Silicon carbide mechanical seal
- ✓ Steel strainer, hose coupling and clamp

### Optional equipment

- + Electric start + Battery (factory option)

SWT 150 EXL12			
		STANDARD	TROLLEY
Pump type			Self-Priming
Suction Ø coupling			
Delivery Ø coupling	mm		100 (4")
Discharge flow	mm		100 (4")
Discharge flow	L/min		2590
Pressure	m <sup>3</sup> /h		155
Total dynamic head	bar		3
Discharge head	m		30
Solid size Ø (Ø of strainer holes)	m		8
Mechanical seal	mm		31
Engine model			Silicon carbide
Engine type			WORMS EX40
Fuel type			OHC, 4-stroke gasoline
Fuel tank capacity			Unleaded gasoline 95
Autonomy	L		14
Dimensions L x l x H	h		2 h 40
Packaging dimensions L x W x H	mm	950 x 615 x 805	1010 x 880 x 950
Net Weight	mm	1200 x 1000 x 950	—
Gross weight	kg	140	150
Poids brut emballé	kg	145	—

### WORMS Entreprises

ZAC de Lamirault  
39 rue de Lamirault  
77090 Collégien  
FRANCE  
TEL. +33 (0) 1 64 76 29 50  
FAX +33 (0) 1 64 76 29 99  
www.wormsentreprises.com