

Trash
Water

High Discharge Flow

Intensive Work

SWT 75 DXL13 DE

Pumps Range

Self-Priming


ENGINE
4ST Diesel

DISCHARGE FLOW
69 m³/h

PRESSURE
2.7 bar

SOLID SIZE Ø
31 mm

NET WEIGHT
103 kg

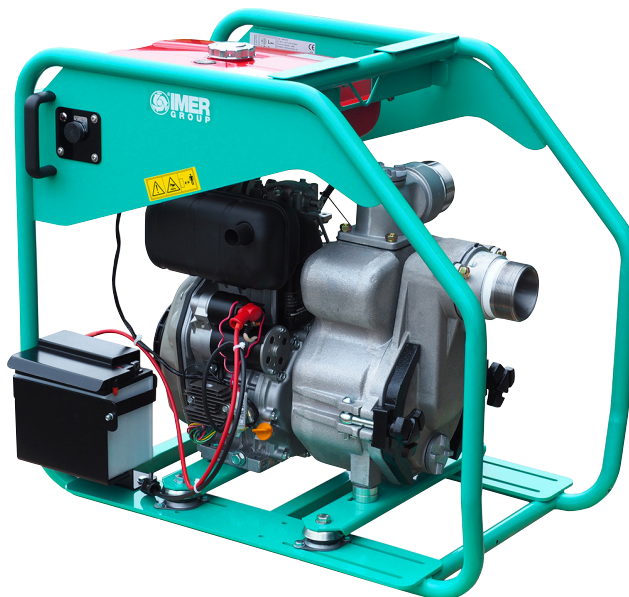

ELECTRIC
Start

EASY QUICK CLEAN
out port

powered by
YANMAR

Built around durability, our SWT gasoline trash pumps feature a silicon carbide seal and a unique conical cast iron impeller design and a quickclean out port for easy maintenance and long service life. They reduce wear from abrasive materials and can handle solid objects up to 31 mm in diameter. There's even a strainer to ensure nothing bigger gets through.

Standard equipment

- ✓ Four-stroke Diesel engine
- ✓ Electric start + Battery
- ✓ Silicon carbide mechanical seal
- ✓ Steel strainer, hose coupling and clamp

Optional equipment

- + Wheelbarrow kit
- + Firefighter hose coupling

SWT 75 DXL13 DE

Pump type		Self-Priming
Suction Ø coupling	mm	75 (3")
Delivery Ø coupling	mm	75 (3")
Discharge flow	L/min	1150
Discharge flow	m ³ /h	69
Pressure	bar	2.7
Total dynamic head	m	27
Discharge head	m	8
Solid size Ø (Ø of strainer holes)	mm	31
Mechanical seal		Silicon carbide
Engine model		YANMAR L70
Engine type		4-stroke Diesel
Fuel type		Diesel (do not use domestic or heating oil)
Fuel tank capacity	L	13
Autonomy	h	13 h 30
Dimensions L x l x H	mm	840 x 603 x 742
Packaging dimensions L x W x H	mm	1200 x 630 x 825
Net Weight	kg	103
Gross weight	kg	107.5

WORMS Entreprises

ZAC de Lamirault
39 rue de Lamirault
77090 Collégien
FRANCE
TEL. +33 (0) 1 64 76 29 50
FAX +33 (0) 1 64 76 29 99
www.wormsentreprises.com