

**Semi Trash
Water**

Self-Priming

4ST Petrol


**3 YEARS
WARRANTY**

DISCHARGE FLOW
42 m³/h

PRESSURE
2.3 bar

SOLIDE SIZE Ø
20 mm

NET WEIGHT
26 kg

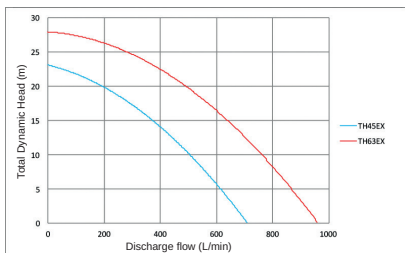

powered by



With deeper impeller vanes coupled with a large volute discharge opening, our semi trash pumps can pass murky water that contains small solid objects without clogging the passage. These self-priming construction pumps feature a tough, silicone carbide mechanical seal. Semi-trash pumps are ideal for dewatering on construction and agricultural sites or in rental applications.

TH 45 EX

| | | |
|------------------------------------|-------------------|-----------------------|
| Pump type | | Self-Priming |
| Suction Ø coupling | mm | 50 (2") |
| Delivery Ø coupling | mm | 50 (2") |
| Discharge flow | L/min | 700 |
| Discharge flow | m ³ /h | 42 |
| Pressure | bar | 2.3 |
| Total dynamic head | m | 23 |
| Discharge head | m | 8 |
| Solid size Ø (Ø of strainer holes) | mm | 20 |
| Mechanical seal | | Silicon carbide |
| Engine model | | Worms EX16 |
| Engine type | | 4 Temps essence |
| Fuel type | | Essence sans plomb 95 |
| Fuel tank capacity | L | 3.2 |
| Run Time | h | 3 |
| Dimensions L x W x H | mm | 527 x 368 x 417 |
| Packaging dimensions L x W x H | mm | 540 x 380 x 440 |
| Net Weight (Gross weight) | kg | 26 |
| Gross weight | kg | 27 |
| Reference | | 2V0004040 |

STANDARD EQUIPMENTS

- ✓ Four-stroke Diesel engine
- ✓ Recoil start
- ✓ Electronic oil sensor security
- ✓ Ceramic carbon mechanical seal
- ✓ Plastic strainer, hose coupling and clamp

OPTIONAL EQUIPMENTS

- ✓ Wheelbarrow kit (factory option): REF. 13
- ✓ Firefighter hose coupling
- ✓ Maintenance KIT N°2