

**Semi Trash
Water**

Self-Priming

4ST Petrol

**3 YEARS
WARRANTY**

DISCHARGE FLOW

60 m³/h

PRESSURE



2.3 bar

SOLIDE SIZE Ø

20 mm

NET WEIGHT

27.5 kg

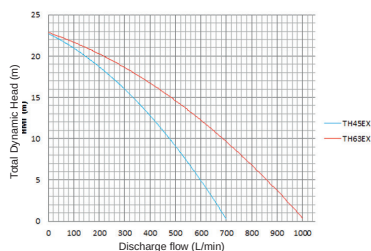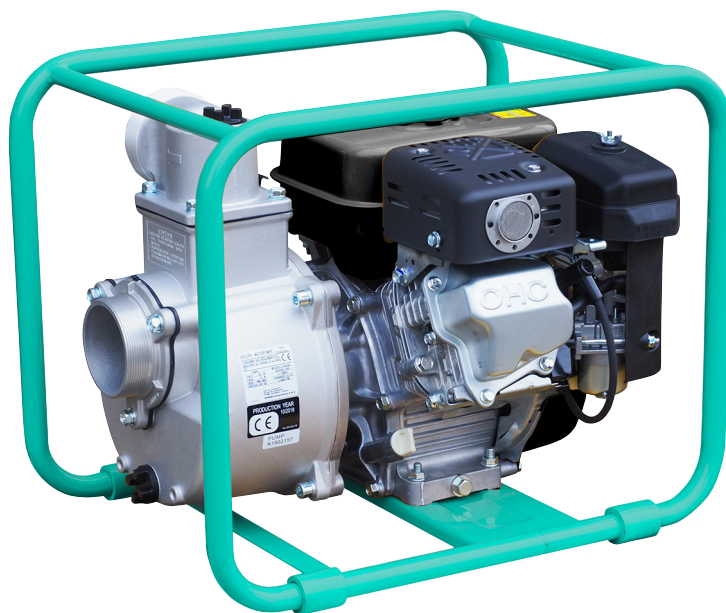

powered by



With deeper impeller vanes coupled with a large volute discharge opening, our semi trash pumps can pass murky water that contains small solid objects without clogging the passage. These self-priming construction pumps feature a tough, silicone carbide mechanical seal. Semi-trash pumps are ideal for dewatering on construction and agricultural sites or in rental applications.

TH 63 EX

Pump type		Self-Priming
Suction Ø coupling	mm	75 (3")
Delivery Ø coupling	mm	75 (3")
Discharge flow	L/min	1000
Discharge flow	m ³ /h	60
Pressure	bar	2.3
Total dynamic head	m	23
Discharge head	m	8
Solid size Ø (Ø of strainer holes)	mm	20
Mechanical seal		Carbure de silicium
Engine model		Worms EX17
Engine type		4 Temps essence
Fuel type		Essence sans plomb 95
Fuel tank capacity	L	3.2
Run Time	h	2 h 20
Dimensions L x W x H	mm	527 x 368 x 417
Packaging dimensions L x W x H	mm	540 x 380 x 440
Net Weight (Gross weight)	kg	27.5
Gross weight	kg	27
Reference		2V0004041

STANDARD EQUIPMENTS

- ✓ Four-stroke Diesel engine
- ✓ Recoil start
- ✓ Electronic oil sensor security
- ✓ Ceramic carbon mechanical seal
- ✓ Plastic strainer, hose coupling and clamp

OPTIONAL EQUIPMENTS

- ✓ Wheelbarrow kit (factory option): REF. 13
- ✓ Firefighter hose coupling
- ✓ Maintenance KIT N°2