PUMPS RANGE

TH 63 EX

Semi Trash Water

Self-Priming

4ST Petrol

3 YEARS WARRANTY

DISCHARGE FLOW
60 m³/h

PRESSURE
2.3 bar

SOLID SIZE Ø
20 mm

NET WEIGHT
27.5 kg

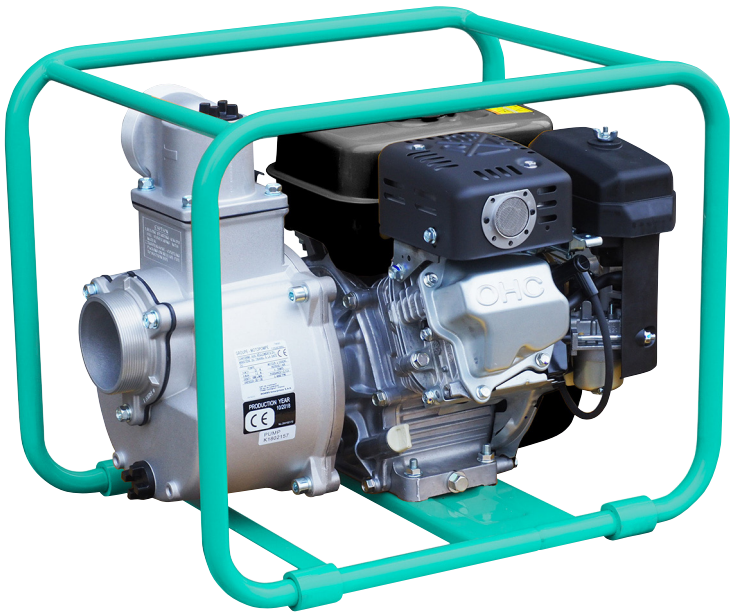

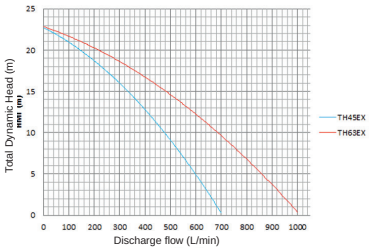

powered by EX WORMS

With deeper impeller vanes coupled with a large volute discharge opening, our semi trash pumps can pass murky water that contains small solid objects without clogging the passage. These self-priming construction pumps feature a tough, silicone carbide mechanical seal. Semi-trash pumps are ideal for dewatering on construction and agricultural sites or in rental applications.

		TH 63 EX
Pump type		Self-Priming
Suction Ø coupling	mm	75 (3")
Delivery Ø coupling	mm	75 (3")
Discharge flow	L/min	1000
Discharge flow	m³/h	60
Pressure	bar	2.3
Total dynamic head	m	23
Discharge head	m	8
Solid size Ø (Ø of strainer holes)	mm	20
Mechanical seal		Silicon carbide
Engine model		Worms EX17
Engine type		OHC, 4-stroke gasoline
Fuel type		Petrol RON 95
Fuel tank capacity	L	3.2
Run Time	h	2 h 20
Dimensions L x W x H	mm	527 x 368 x 417
Packaging dimensions L x W x H	mm	540 x 380 x 440
Net Weight (Gross weight)	kg	27.5
Gross weight	kg	27
Reference		2V0004041

STANDARD EQUIPMENTS

- ✔ Four-stroke Diesel engine
- ✔ Recoil start
- ✔ Electronic oil sensor security
- ✔ Ceramic carbon mechanical seal
- ✔ Plastic strainer, hose coupling and clamp

OPTIONAL EQUIPMENTS

- ✔ Wheelbarrow kit (factory option): REF. 13
- ✔ Firefighter hose coupling
- ✔ Maintenance KIT N°2

The constructor reserves the right to modify its machines without prior notice. Photographs, descriptions and characteristics are for indicative purpose and cannot commit the constructor.

Édition : 20240919

ZAC DE LAMIRAULT, 39 rue de Lamirault, 77090 COLLEGIEN FRANCE
Tel : (+33) 1 64 76 29 50