

FRESH WATER

Self-Priming

4ST Petrol

3 YEARS
WARRANTY

DISCHARGE FLOW

16.2 m³/h

PRESSURE

2.4 bar

SOLIDE SIZE Ø


5.5 mm

NET WEIGHT

16 kg



powered by

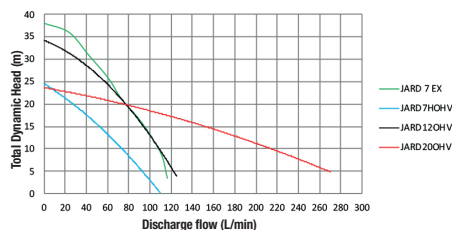

The JARD models are compact and have a 4-stroke engine, more efficient and more environmentally friendly than 2-stroke engines. Equipped with a carrying handle for easier handling, they are perfectly intended for watering and irrigation of parks and gardens as well as emptying the waters of the cellar.

JARD 20 OHV

Pump type		Self-Priming
Suction Ø coupling	mm	40 (1.5")
Delivery Ø coupling	mm	40 (1.5")
Discharge flow	L/min	270
Discharge flow	m ³ /h	16.2
Pressure	bar	2.4
Total dynamic head	m	24
Discharge head	m	8
Solid size Ø (Ø of strainer holes)	mm	5.5
Mechanical seal		Ceramic carbon
Engine model		CC ROBIN EH09
Engine type		OHV, 4-stroke gasoline
Fuel type		Unleaded gasoline 95
Fuel tank capacity	L	1.5
Run Time		2 h 25
Dimensions L x W x H	mm	370 x 300 x 420
Packaging dimensions L x W x H	mm	430 x 340 x 470
Net Weight (Gross weight)	kg	16
Poids brut emballé	kg	18
Reference		200004002

STANDARD EQUIPMENTS

- ✓ OHV, 4-stroke gasoline engine
- ✓ Recoil starter
- ✓ Ceramic carbon mechanical seal
- ✓ Plastic strainer, hose coupling and clamp

OPTIONAL EQUIPMENTS

- ✓ Firefighter hose coupling