

FRESH WATER

TP 110H
Pumps Range

Self-Priming


ENGINE
4ST | Gasoline

DISCHARGE FLOW
90 m³/h

PRESSURE
2.8 bar

SOLID SIZE Ø
7 mm

NET WEIGHT
47 kg

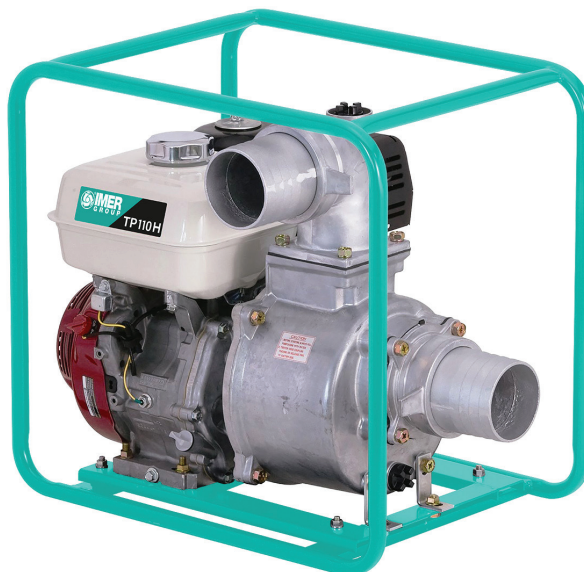

3 YEARS
WARRANTY

powered by
HONDA

TP range are suitable for clear and light trash transfer and accept particles up to 7.5 mm. High-performance materials such as the ceramic carbon mechanical seal and die-cast aluminum body pump provide excellent reliability and durability.

Standard equipment

- ✓ Four-stroke OHC engine
- ✓ Recoil start
- ✓ Electronic oil sensor security
- ✓ Ceramic carbon mechanical seal
- ✓ Plastic strainer, hose coupling and clamp

Optional equipment

- + Wheelbarrow kit (factory option): 4NC
- + Firefighter hose coupling

TP 110 H		
Pump type		Self-Priming
Suction Ø coupling	mm	100 (4")
Delivery Ø coupling	mm	100 (4")
Discharge flow	L/min	1500
Discharge flow	m ³ /h	90
Pressure	bar	2.8
Total dynamic head	m	28
Discharge head	m	8
Solid size Ø (Ø of strainer holes)	mm	7
Mechanical seal		Ceramic carbon
Engine model		HONDA GX240
Engine type		OHC, 4-stroke gasoline
Fuel type		Unleaded gasoline 95
Fuel tank capacity	L	5.3
Autonomy	h	2 h 10
Dimensions L x l x H	mm	610 x 425 x 565
Packaging dimensions L x W x H	mm	635 x 450 x 600
Net Weight	kg	47
Gross weight	kg	49

WORMS Entreprises

ZAC de Lamirault
39 rue de Lamirault
77090 Collégien
FRANCE
TEL. +33 (0) 1 64 76 29 50
FAX +33 (0) 1 64 76 29 99
www.wormsentreprises.com