

FRESH WATER

**TP 65 EX**  
Pumps Range

Self-Priming


ENGINE  
**4ST | Gasoline**

DISCHARGE FLOW  
**60 m<sup>3</sup>/h**

PRESSURE  
**3.2 bar**

SOLID SIZE Ø  
**7.5 mm**

NET WEIGHT  
**25.5 kg**

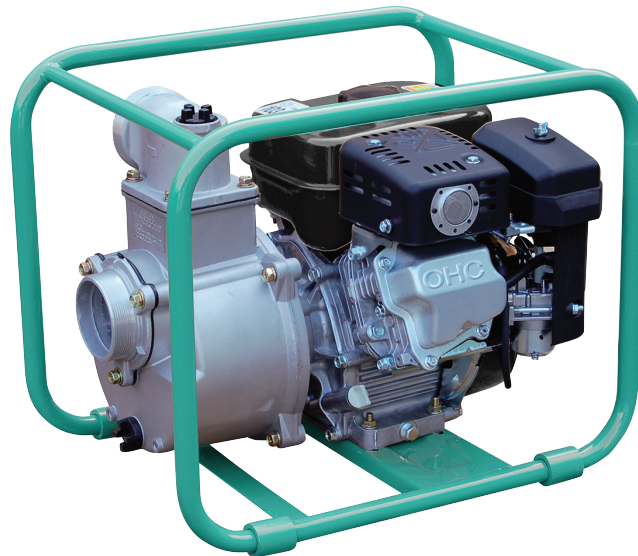

**3 YEARS**  
WARRANTY



TP range are suitable for clear and light trash transfer and accept particles up to 7.5 mm. High-performance materials such as the ceramic carbon mechanical seal and die-cast aluminum body pump provide excellent reliability and durability.

### Standard equipment

- ✓ Four-stroke OHC engine
- ✓ Recoil start
- ✓ Electronic oil sensor security
- ✓ Ceramic carbon mechanical seal
- ✓ Plastic strainer, hose coupling and clamp

### Optional equipment

- + Wheelbarrow kit (factory option): REF. 13
- + Firefighter hose coupling
- + Maintenance KIT N°2

TP 65 EX		
Pump type		Self-Priming
Suction Ø coupling	mm	75 (3")
Delivery Ø coupling	mm	75 (3")
Discharge flow	L/min	1000
Discharge flow	m <sup>3</sup> /h	60
Pressure	bar	3.2
Total dynamic head	m	32
Discharge head	m	8
Solid size Ø (Ø of strainer holes)	mm	7.5
Mechanical seal		Ceramic carbon
Engine model		WORMS EX17
Engine type		OHC, 4-stroke gasoline
Fuel type		Unleaded gasoline 95
Fuel tank capacity	L	3.2
Autonomy	h	2 h 20
Dimensions L x l x H	mm	540 x 368 x 417
Packaging dimensions L x W x H	mm	545 x 380 x 430
Net Weight	kg	25.5
Gross weight	kg	27.5

### WORMS Entreprises

ZAC de Lamirault  
39 rue de Lamirault  
77090 Collégien  
FRANCE  
TEL. +33 (0) 1 64 76 29 50  
FAX +33 (0) 1 64 76 29 99  
www.wormsentreprises.com